

nifty



TM40 TRAILER MOUNTED WORK PLATFORM



46ft 9in (14.25m)
Working height

21ft (6.40m)
Working outreach

Hydraulic Outriggers
For quick & easy setup

**Fully Proportional
Hydraulic Controls**
Simple, reliable &
easy to maintain

Bi-Energy Available
Optimizing utilization

4ft 11in Wide Platform
Larger area for operator to work

150° Flyboom
Greater accuracy when
positioning platform



niftylift.com




nifty TM40


The Nifty TM40 is the first of a new generation of Nifty trailer mounts taking advantage of developments in design and build technology. It delivers outstanding reach performance without compromising on functionality or quality. With one of the largest platforms in its class and a 150° flyboom, positioning is easy and hydraulic outriggers make setting up quicker than ever before.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- Meets OSHA and ANSI regulations

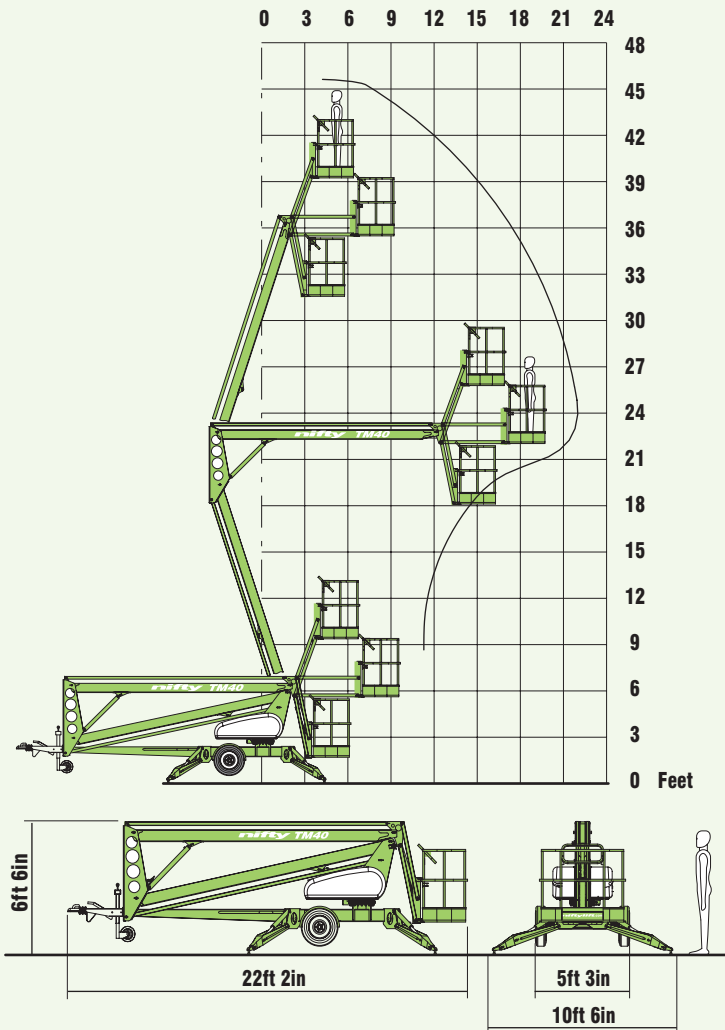

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

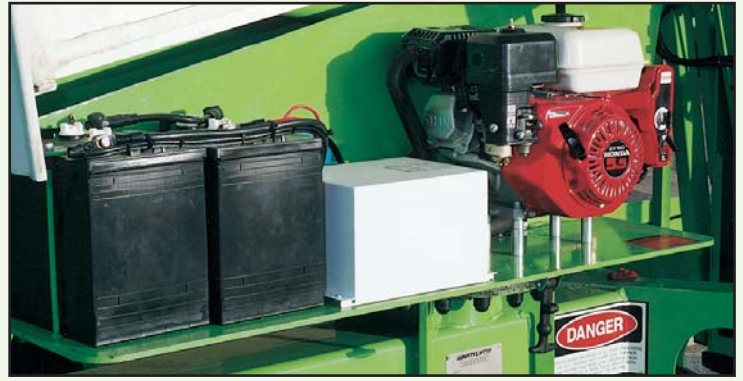

The Bi-Energy power option improves utilization for the TM40 by allowing operation in discreet and fume free environments or for extended periods where no external power source is available.



Hydraulic outriggers allow quick and easy setup and the audible alarm ensures that the operator is aware of an incorrect setup, when working in the busiest of environments.

SPECIFICATIONS

Working Height	46ft 9in	14.25m
Platform Height	40ft 2in	12.25m
Working Outreach	21ft	6.40m
Slew	360°	
Flyboom Arc	150°	
Width - Traveling	5ft 3in	1.60m
- Working	10ft 6in	3.20m
Height - Overall	6ft 6in	1.97m
Length - Overall	22ft 2in	6.75m
Weight	3,060lbs - 3,265lbs*	1,400kg - 1,470kg*
Platform Capacity	500lbs	225kg
Platform Size	5ft x 2ft 5in	1.50m x 0.70m
Control System	Fully Proportional Hydraulic	
Power System	Mains Only Battery Only Gas or Diesel Only Bi-Energy (engine & battery)	
Drive Option	Traction Drive	

* Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT INC
825 North Driveway,
Glen Ellyn IL, 60137-5726, USA
Tel.: 1-800-NIFTYLIFT
Tel.: 1-630-858-0822
Fax.: 1-630-858-0520
e.mail: aeriallift@aol.com

www.niftylift.com

NIFTYLIFT LTD
Fingle Drive, Stonebridge
Milton Keynes, MK13 0ER
England, United Kingdom
Tel.: +44 (0)1908 223456
Tel.: +44 (0)1908 312733
e.mail: info@niftylift.com