

# nifty



## **TM50** TRAILER MOUNTED WORK PLATFORM



**56ft 1in (17.10m)**

Working height

**28ft 6in (8.70m)**

Working outreach

### **Telescopic Upper Boom**

Greater accuracy when  
positioning platform

### **Hydraulic Outriggers**

For quick & easy setup

### **Fully Proportional Hydraulic Controls**

Simple, reliable &  
easy to maintain

### **Bi-Energy Available**

Optimizing utilization



**niftylift.com**




# nifty™ TM50


With one of the largest working envelopes in its class the Nifty TM50 delivers maximum reach with stability and control. Octagonal boom sections provide strength without compromising on weight and the telescopic upper boom improves accuracy when positioning the platform. Hydraulically operated outriggers and controls make setting up and operating quick and easy, especially on uneven surfaces.

## SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Double Acting Cylinders
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- Meets OSHA and ANSI regulations

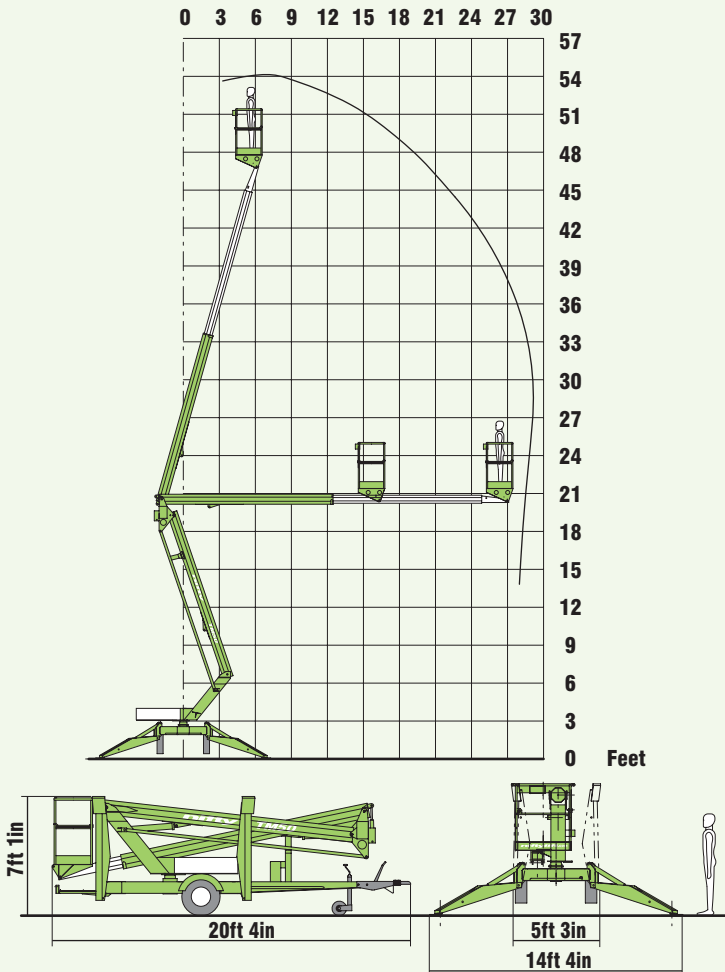

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

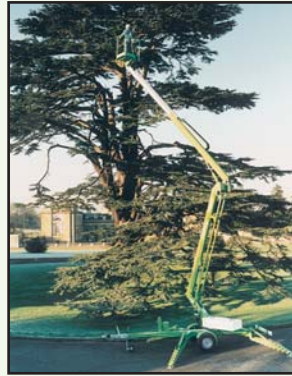

The TM50's outstanding reach makes it ideal for a wide range of applications.



Also available on a self-drivable 2x4 or 4x4 base, the Nifty SD50.



Fully proportional hydraulic outriggers make setting up and leveling quick and easy even on gradients.

## SPECIFICATIONS

<b>Working Height</b>	56ft 1in	17.10m
<b>Platform Height</b>	49ft 6in	15.10m
<b>Working Outreach</b>	28ft 6in	8.70m
<b>Slew</b>	360°	
<b>Width - Traveling</b>	5ft 3in	1.60m
<b>- Working</b>	14ft 4in	4.37m
<b>Height - Overall</b>	7ft 1in	2.16m
<b>Length - Overall</b>	20ft 4in	6.20m
<b>Weight</b>	4,180lbs - 4,400lbs*	1,900kg - 2,000kg*
<b>Platform Rotation (Optional)</b>	100°	
<b>Platform Capacity</b>	500lbs	225kg
<b>Platform Size</b>	3ft 8in x 2ft 1in	1.10m x 0.65m
<b>Control System</b>	Fully Proportional Hydraulic	
<b>Power System</b>	Mains Only Battery Only Gas or Diesel Only Bi-Energy (engine & battery)	
<b>Drive Option</b>	Traction Drive	

\* Weights may vary according to specification / power options, please confirm before ordering.

## Supplied by:

## Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

**NIFTYLIFT INC**  
825 North Driveway,  
Glen Ellyn IL, 60137-5726, USA  
Tel.: 1-800-NIFTYLIFT  
Tel.: 1-630-858-0822  
Fax.: 1-630-858-0520  
e.mail: aeriallift@aol.com

www.niftylift.com

**NIFTYLIFT LTD**  
Fingle Drive, Stonebridge  
Milton Keynes, MK13 0ER  
England, United Kingdom  
Tel.: +44 (0)1908 223456  
Fax.: +44 (0)1908 312733  
e.mail: info@niftylift.com