

nifty



TM50 TRAILER MOUNTED WORK PLATFORM



56ft 1in (17.10m)

Working height

28ft 6in (8.70m)

Working outreach

Telescopic Upper Boom

Greater accuracy when
positioning platform

Hydraulic Outriggers

For quick & easy setup

Fully Proportional Hydraulic Controls

Simple, reliable &
easy to maintain

Bi-Energy Available

Optimizing utilization



niftylift.com




nifty™ TM50

With one of the largest working envelopes in its class the Nifty TM50 delivers maximum reach with stability and control. Octagonal boom sections provide strength without compromising on weight and the telescopic upper boom improves accuracy when positioning the platform. Hydraulically operated outriggers and controls make setting up and operating quick and easy, especially on uneven surfaces.

SAFETY FEATURES

- Pressure Sensitive Outriggers
- Audible and Visible Alarms
- Double Acting Cylinders
- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- Overrun Brakes with Gas Spring Hand Brake
- Dual Harness Points
- Meets OSHA and ANSI regulations

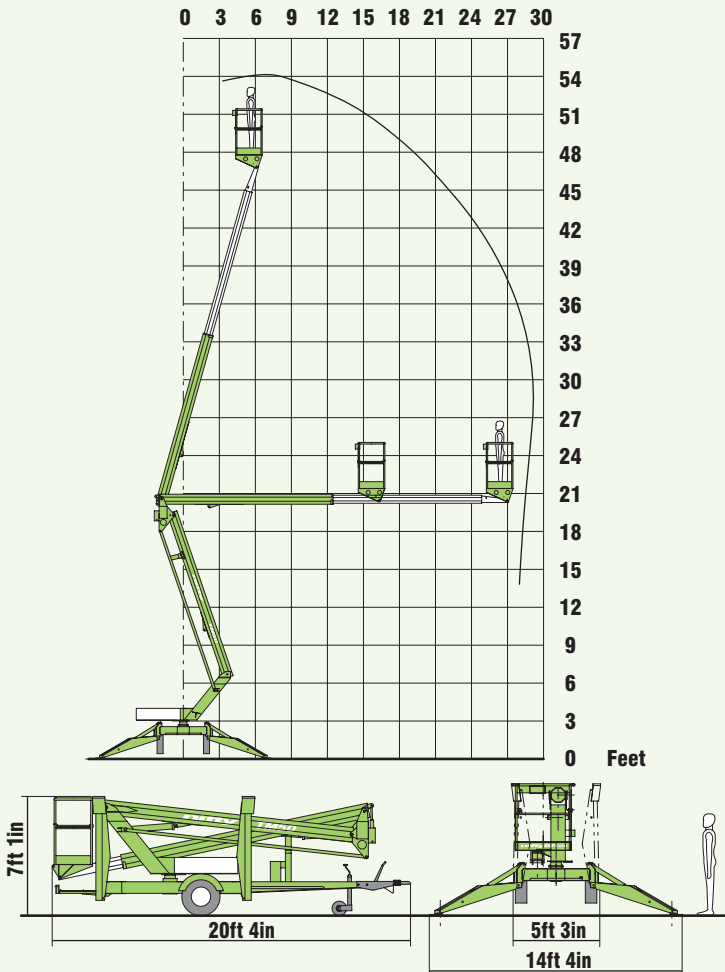


Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.



The TM50's outstanding reach makes it ideal for a wide range of applications.



Also available on a self-drivable 2x4 or 4x4 base, the Nifty SD50.

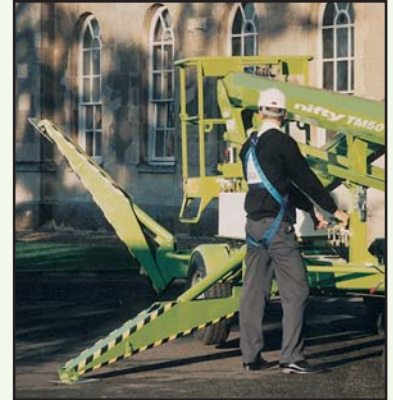

Fully proportional hydraulic outriggers make setting up and leveling quick and easy even on gradients.

SPECIFICATIONS

Working Height	56ft 1in	17.10m
Platform Height	49ft 6in	15.10m
Working Outreach	28ft 6in	8.70m
Slew	360°	
Width - Traveling	5ft 3in	1.60m
- Working	14ft 4in	4.37m
Height - Overall	7ft 1in	2.16m
Length - Overall	20ft 4in	6.20m
Weight	4,180lbs - 4,400lbs*	1,900kg - 2,000kg*
Platform Rotation (Optional)	100°	
Platform Capacity	500lbs	225kg
Platform Size	3ft 8in x 2ft 1in	1.10m x 0.65m
Control System	Fully Proportional Hydraulic	
Power System	Mains Only Battery Only Gas or Diesel Only Bi-Energy (engine & battery)	
Drive Option	Traction Drive	

* Weights may vary according to specification / power options, please confirm before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT INC
825 North Driveway,
Glen Ellyn IL, 60137-5726, USA
Tel.: 1-800-NIFTYLIFT
Tel.: 1-630-858-0822
Fax.: 1-630-858-0520
e.mail: aeriallift@aol.com

www.niftylift.com

NIFTYLIFT LTD
Fingle Drive, Stonebridge
Milton Keynes, MK13 0ER
England, United Kingdom
Tel.: +44 (0)1908 223456
Fax.: +44 (0)1908 312733
e.mail: info@niftylift.com